



P-C Panel Board Fasteners

Series CPFK



CPFK P-C board panel fasteners provide permanent attachment of screw assemblies to P-C board substrate material. Screw assemblies remain captive for easy mounting and removal of board.

Series	Material	Finish
CPFK	300 Series Stainless Steel	Passivated ASTM A380

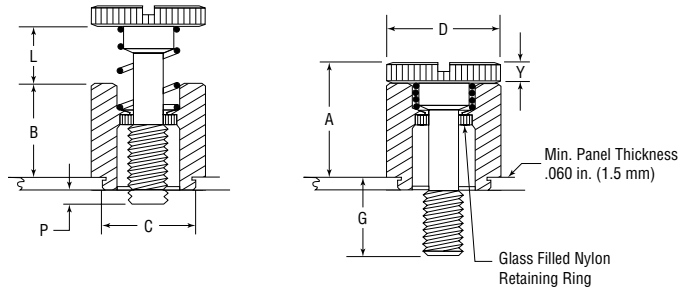

Dimensions & Specifications

	Thread Size	Part Number	G ± .016 in. (0.4 mm)	P ± .016 in. (0.4 mm)	L ± .016 in. (0.4 mm)	D +.016 in. -.010 in. +0.4 mm -0.25 mm	A Max.	Y ± .005 in. (0.13 mm)	B ± .010 in. (0.25mm)	C ± .003 in. (0.08mm)	+ .003 in. (0.08 mm) - .000	Min.
INCH (in.)	#4-40	CPFK440-40	.250	.000	.19	.310	.36	.070	.28	.283	.265	.20
		CPFK440-62	.375	.125								
		CPFK440-84	.500	.250								
INCH (in.)	#6-32	CPFK632-40	.250	.000	.19	.340	.36	.070	.28	.299	.281	.26
		CPFK632-62	.375	.125								
		CPFK632-84	.500	.250								
METRIC (mm)	M3 x 0.5	CPFKM3-40	6.4	0.0	4.8	8.2	9.1	1.9	7.2	7.28	6.75	5.1
		CPFKM3-62	9.5	3.2								
		CPFKM3-84	12.7	6.4								

Installation & Performance Data

	Thread Size	Fiberglass 0.060 in. (1.5 mm)		
		Installation Force (lbs.)	Pushout (lbs.)	Torque-out (in.-lbs.)
INCH (in.)	#4-40	250	55	(1)
	#6-32	400	60	(1)
METRIC (mm)	Thread Size	Installation Force (kN)	Pushout (N)	Torque-out (N•m)
	M3	1.1	245	(3)